



pendant


ETAT-DES-LIEUX

Design by Alexandre Joncas

Etat-des-Lieux, a contemporary lighting system defined by its variable silhouette, pays homage to the scenic Laurentian mountains and their majestic reflections in nearby waters. Engineered using innovative design and unique technical savvy, the timeless geometric installation inspired by the beauty of the landscape, is infused with precision and poetry.

Clean-lined and aesthetically spare, the versatile structure can be configured according to the demands of any space it inhabits, whether public or residential. Starting from a base foundation of one light point, Etat-des-Lieux can be arranged in countless ways, growing in space in any orientation, it can include multitudinous light modules to create a monumental and striking centrepiece.

Hollowed light points with soft rounded edges, available in five various mood-setting tints of glass, hang from flat straps that can be adjusted to the desired length. Playful and unconventional, it also allows for an orientation of the light beam, either up or down, setting a mystifying atmosphere.




archiproducts®

DESIGN AWARDS

—
WINNER 2020

EDL 3A with clear transparent glass diffuser

ETAT-DES-LIEUX
pendant - composition

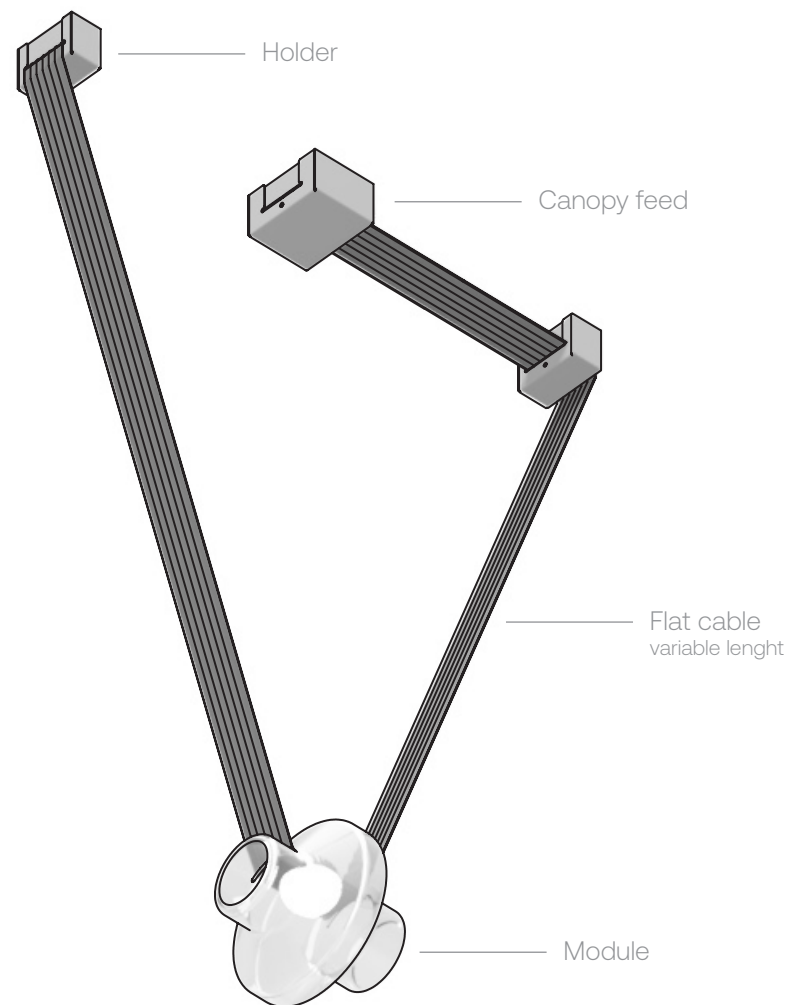

ETAT-DES-LIEUX

pendant - composition suite

Module / Light engine :

The light engines is composed of a led board, aluminum heatsink and a glass frosted diffuser fixed along the flat cable, it can be either direct or indirect. Enclosure is made of handmade blowingglass. It uses the technology Dim to warm or can simply be preset to a fix color temperature.

Lamping specifications :

LED CCT


2700K fix or dim to warm at 2200K

3000K fix or dim to warm at 2200K


3500K fix or dim to warm at 2200K

4000K fix only


Dim to warm
2700K to 2200K



Dim to warm
3000K to 2200K



Dim to warm
3500K to 2200K



**other fix CCT available upon request*



CRI: ≥ 93

1288 Lumens/Module

9.7 Watts/Module



Light emission :




**Direct & Indirect offered for configurations with more than 1 module.*

Glass diffuser colors :

- Clear Grey
- Clear transparent
- Clear pink
- Clear amber
- Frosted Grey
- Frosted Transparent
- Frosted pink
- Frosted Amber
- Custom

Glass diffuser dimensions :

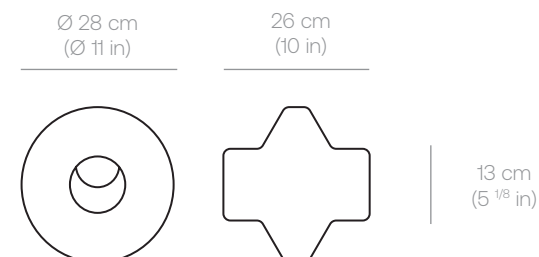

ETAT-DES-LIEUX

pendant - composition suite 2


Canopy feed :

Mounted on a regular junction box. Aluminum clear anodized finish.

Driver specifications :

cULus : 120V dimming 0-10V / Triac*
 CE : 220V-240V dimming 0-10V / Triac*


**Contact d'Armes for recommended wall dimmer*

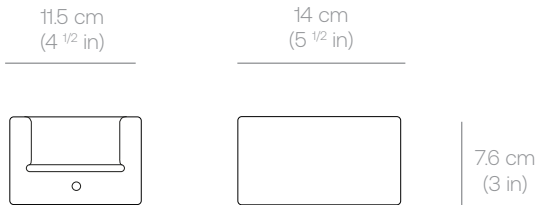

Voltage	Model	Wattage Input	Lumen source
120V	1	9,7W	1103lm
	2	19,4W	2206lm
	3	27,2W	3309lm
220V/240V	1	9,7W	1103lm
	2	19,4W	2206lm
	3	27,2W	3309lm


Cable holder :

Used to hold the module in line.

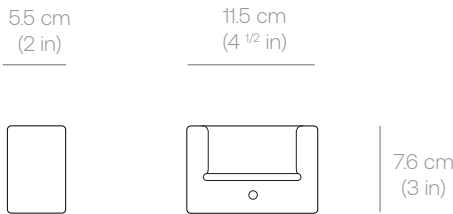

Flat cable :

The extruded black matt polyurethane strap is all in one the electrical conductor and support of the module. Length adjustable on site.



Configurations :

Different configurations available for quick ordering code, place multiple configuration together to create your own design. For custom design and to better fit your needs, see Etat-des-Lieux system spec sheet next pages.



ETAT-DES-LIEUX

pendant - 1A


Model	Code	Length (L)	Width (W)*	Depth (D)
1A	A	61cm (24in)		
	B	89cm (35in)	26cm (10in)	28cm (11in)
	C	112cm (44in)		
	D	201cm (79in)		

**Width is calculated with canopy and support installed inside the strap.
 **The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

Canopy
feed




Width



Length

min 61 cm
(24 in)

Depth




ETAT-DES-LIEUX

pendant - 1B / 1C





Model	Code	Length (L)	Width (W)*	Depth (D)
1B 1C	A	61cm (24in)	41.7cm (16.4in)	28cm (11in)
	B	89cm (35in)	59cm (23 1/4in)	
	C	112cm (44in)	78cm (30 3/4in)	
	D	201cm (79in)	151.6cm (59.7in)	

**Width is calculated with canopy and support installed inside the strap.
 **The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

1B



1C

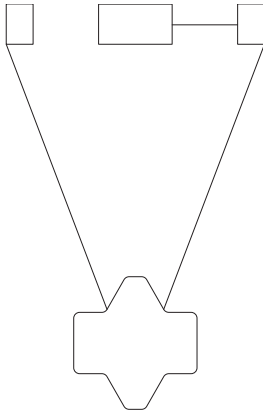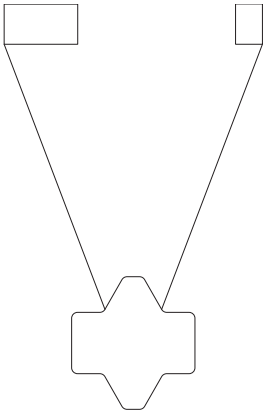
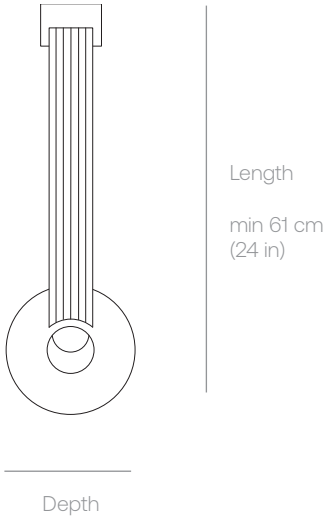



ETAT-DES-LIEUX

pendant - 2A

Model	Code	Length (L)	Width (W)*	Depth (D)
2A	B	89cm (35in)	64.7cm (25.5in)	28cm (11in)
	C	112cm (44in)	83.8cm (33in)	
	D	201cm (79in)	157.5cm (62in)	

**Width is calculated with canopy and support installed inside the strap.
 **The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

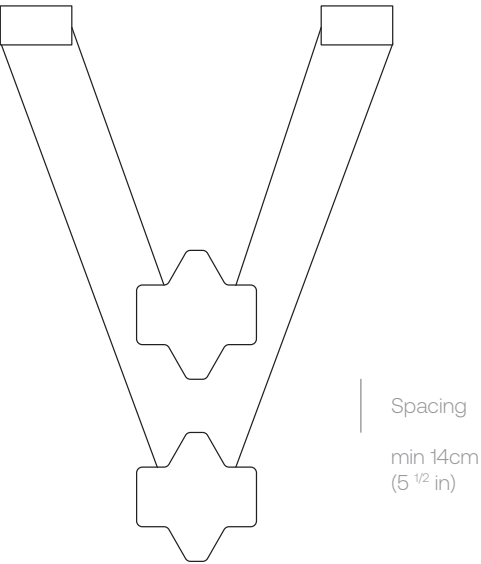
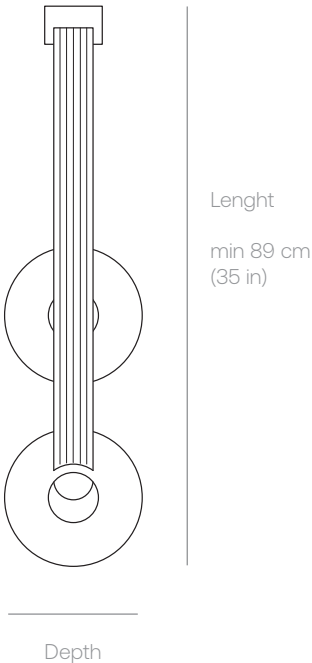
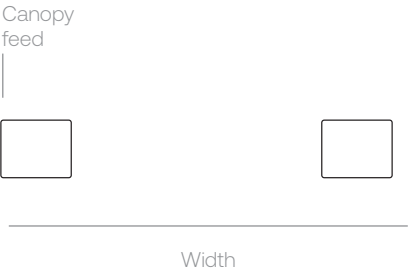


ETAT-DES-LIEUX

pendant - 2B

Model	Code	Length (L)	Width (W)*	Depth (D)
2B	A	61cm (24in)	94.8cm (37.3in)	28cm (11in)
	B	89cm (35in)	141cm (55.5in)	
	C	112cm (44in)	179cm (70.5in)	
	D	201cm (79in)	326cm (128.4in)	

**Width is calculated with canopy and support installed inside the strap.
 **The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

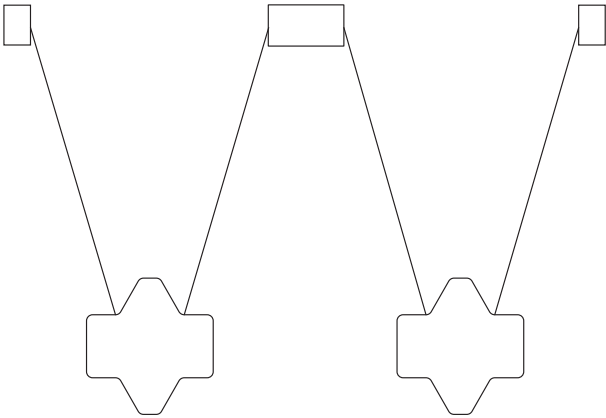
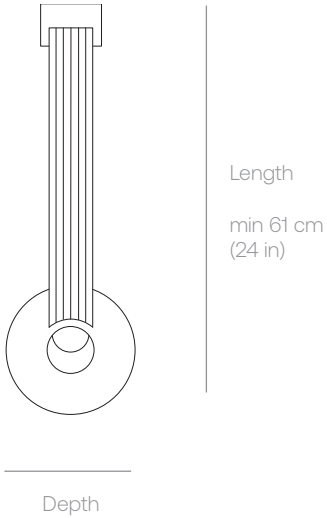
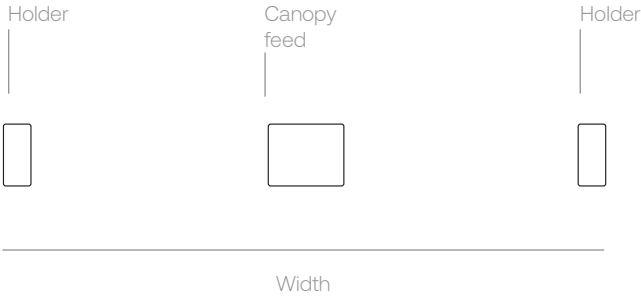


ETAT-DES-LIEUX

pendant - 2C

Model	Code	Leng (L)	Width (W)*	Depth (D)
2C	B	89cm (35in)	64.3cm (25.3in)	29.7cm (11.7in)
	C	112cm (44in)	83.3cm (32.8in)	48.3cm (19in)
	D	201cm (79in)	157cm (61.8in)	122cm (48in)

**Width is calculated with canopy and support installed inside the strap.*
***The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

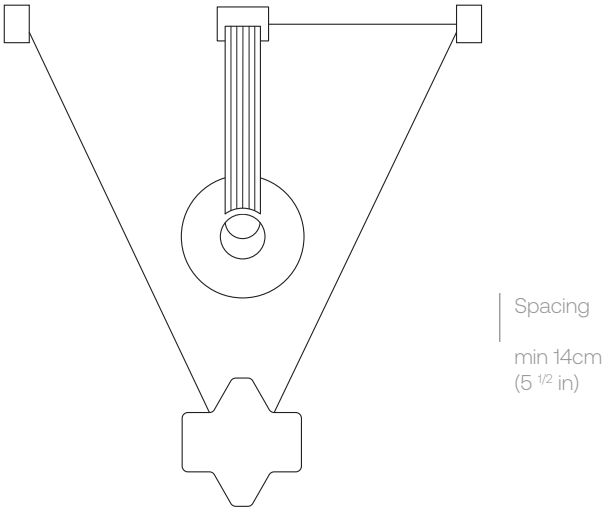
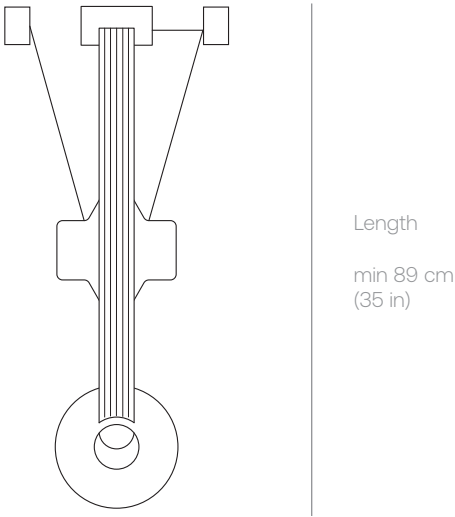
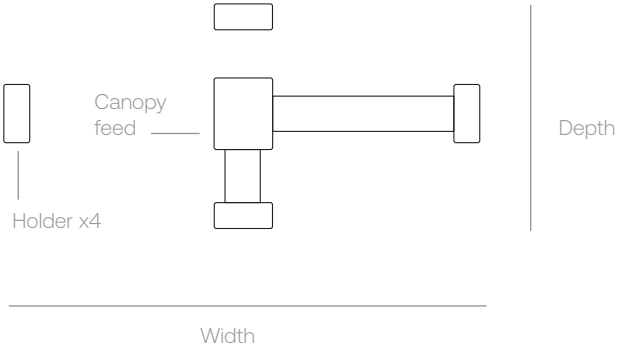


ETAT-DES-LIEUX

pendant - 3A

Model	Code	Length (L)	Width (W)*	Depth (D)
3A	C	140cm (55in)	106.7cm (42in)	71.6cm (28.2in)
	D	201cm (79in)	157cm (61.8in)	122cm (48in)

**Width is calculated with canopy and support installed inside the strap.*
***The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

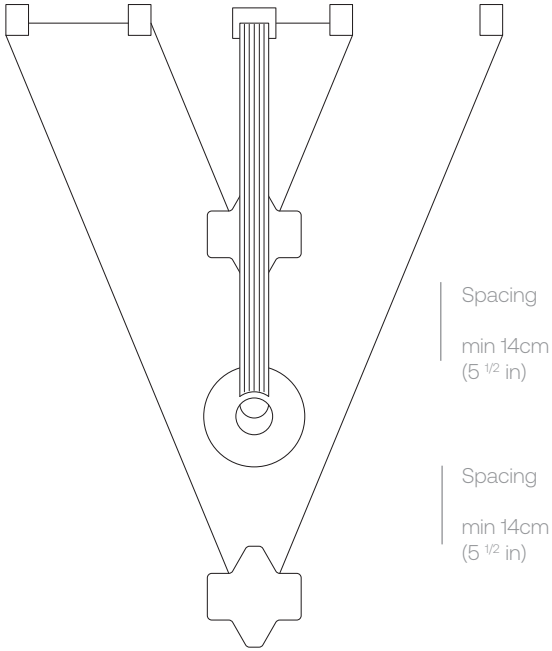
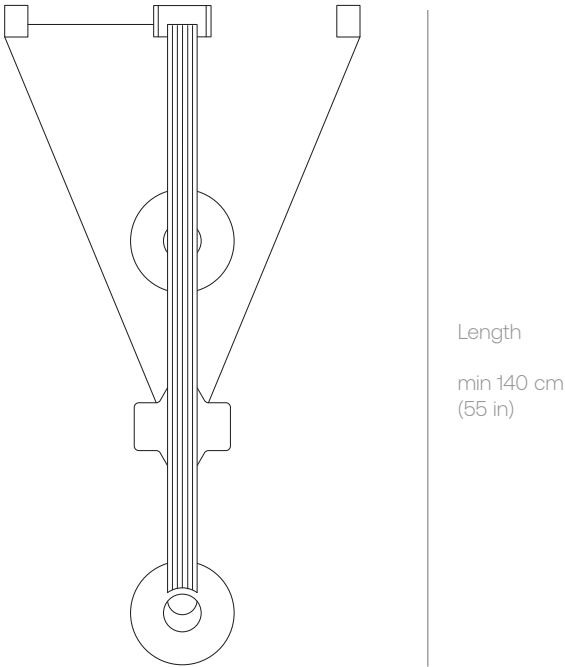
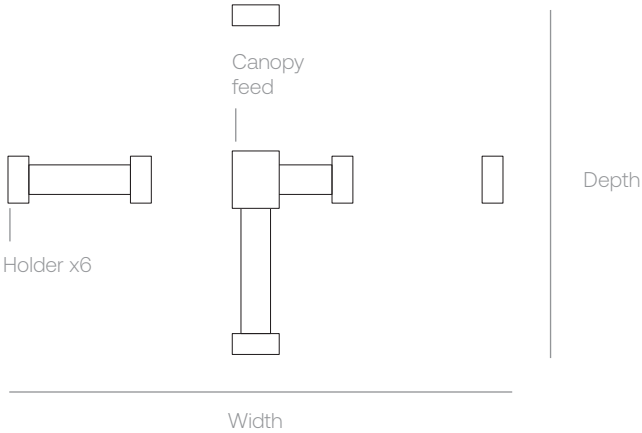


ETAT-DES-LIEUX

pendant - 3B

Model	Code	Length (L)	Width (W)*	Depth (D)
3B	A	61cm (24in)	152.4cm (60in)	41.7cm (16.4in)
	B	89cm (35in)		59cm (23 1/4in)
	C	112cm (44in)		78cm (30 3/4in)
	D	201cm (79in)		151.6cm (59.7in)

**Width is calculated with canopy and support installed inside the strap.
 **The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.*

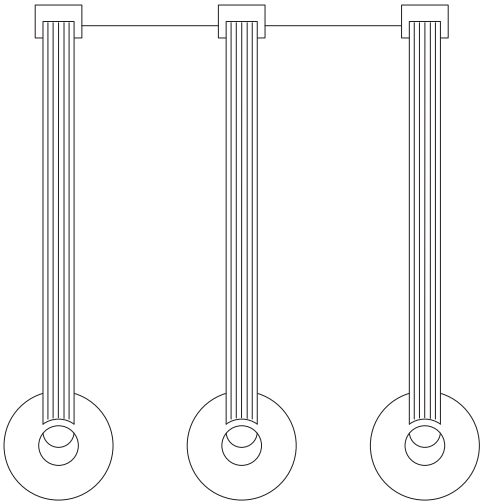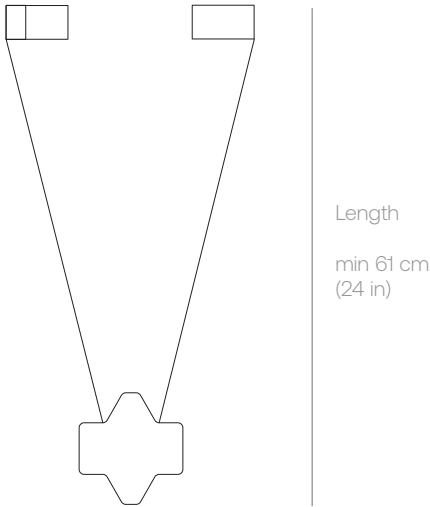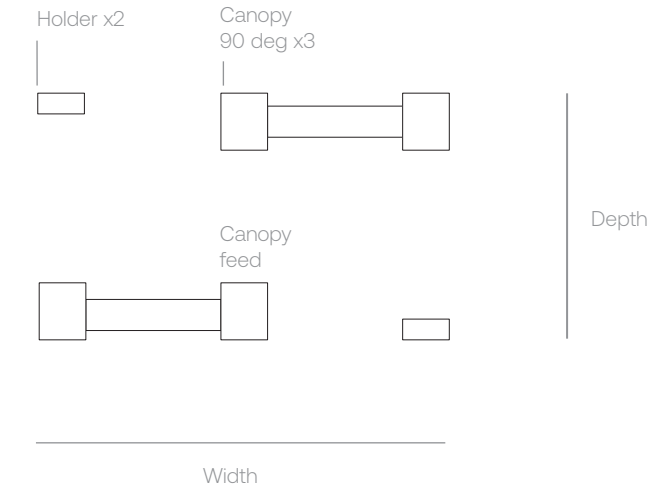


ETAT-DES-LIEUX

pendant - multiple configurations



Place multiple configurations together to create your own design.
1x 2B + 2X 1A

Exemple shown is one of many ways possible.
For complete custom design and to better fit your needs see
État des Lieux system sheet.

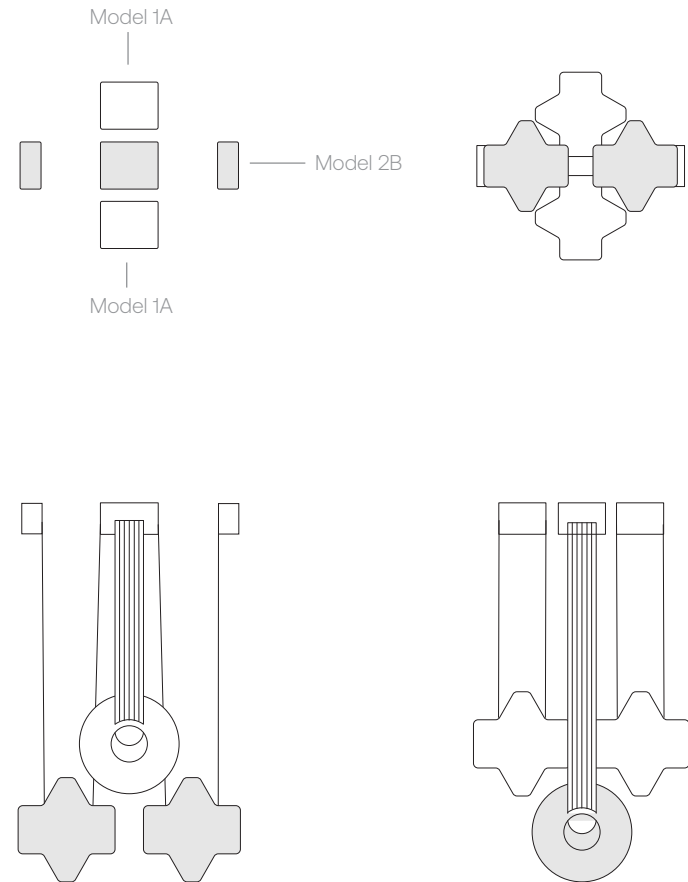

ETAT-DES-LIEUX

pendant - dimensions

Model	Variations	Code	Length	Width*	Depth
1	A	A	61cm (24in)		
		B	89cm (35in)	26cm (10in)	28cm (11in)
		C	112cm (44in)		
		D	201cm (79in)		
	B C	A	61cm (24in)	41.7cm (16.4in)	
		B	89cm (35in)	59cm (23 1/4in)	28cm (11in)
		C	112cm (44in)	78cm (30 3/4in)	
		D	201cm (79in)	151.6cm (59.7in)	
2	A	B	89cm (35in)	64.7cm (25.5in)	
		C	112cm (44in)	83.8cm (33in)	28cm (11in)
		D	201cm (79in)	157.5cm (62in)	
	B	A	61cm (24in)	94.8cm (37.3in)	
		B	89cm (35in)	141cm (55.5in)	28cm (11in)
		C	112cm (44in)	179cm (70.5in)	
		D	201cm (79in)	326cm (128.4in)	
	C	B	89cm (35in)	64.3cm (25.3in)	29.7cm (11.7in)
		C	112cm (44in)	83.3cm (32.8in)	48.3cm (19in)
		D	201cm (79in)	157cm (61.8in)	122cm (48in)
3	A	C	140cm (55in)	106.7cm (42in)	71.6cm (28.2in)
		D	201cm (79in)	157cm (61.8in)	122cm (48in)
	B	A	61cm (24in)		41.7cm (16.4in)
		B	89cm (35in)	152.4cm (60in)	59cm (23 1/4in)
		C	112cm (44in)		78cm (30 3/4in)
		D	201cm (79in)		151.6cm (59.7in)

*Width is calculated with canopy and support installed inside the strap.

**The dimensions are calculated with an angle of 45 deg. Length of strap can only be shorten on site unless custom dimensions are provided.



EDL 1A with clear transparent glass diffuser

ETAT-DES-LIEUX

pendant - specifications

Light emission	Direct, Indirect or Direct & Indirect*
CCT	LED Dim to warm 2700K to 2200K LED Dim to warm 3000K to 2200K LED Dim to warm 3500K to 2200K LED Fix 2700K / 3000K / 3500K / 4000K
CRI	≥93
Lumen output	1103lm/ module
Ratings	120V dim 0-10V / Triac 220V-240V dim 0-10V / Triac
Strap	Flat black polyurethane
Certifications	IP20  

Voltage Input	Model	Wattage input	lumen source	Weight
120V	1	9,7W	1288lm	9 lbs
	2	19,4W	2576lm	18 lbs
	3	27,2W	3578lm	27 lbs
220V/240V	1	9,7W	1288lm	9 lbs
	2	19,4W	2576lm	18 lbs
	3	27,2W	3578lm	27 lbs

Order code Generator	Series	Model	Variations	Finish**	CCT	LED	Emission**	Voltage-Dimming	Dimension***	QTY					
	EDL	État des Lieux	1	A	CG	Clear Grey	27	2700K	F	Fix	D	Direct	1	120V 0-10V	A
			2	B	CT	Clear Transparent	30	3000K	D	Dim to Warm	I	Indirect	2	120V Triac	B
			3	C	CP	Clear Pink	35	3500K	H	Direct/ Indirect	H	Direct/ Indirect	3	220-240V 0-10V	C
					CA	Clear Amber	40	4000K					4	220-240V Triac	D
					FG	Frosted Grey	ZZ	Custom							Z
					FT	Frosted Transparent									
					FP	Frosted Pink									
					FA	Frosted Amber									
					ZZ	Custom									
Order code :	EDL	---	---	----	---	---	---	---	---	---	---	---	---		



EDL 2C with frosted amber glass diffuser

Glass diffuser color

-  Clear Grey
-  Clear Transparent
-  Clear Pink
-  Clear Amber
-  Frosted Grey
-  Frosted Transparent
-  Frosted Pink
-  Frosted Amber
-  Custom

*Direct/ Indirect only available for configurations with more than 1 module.

** Finish and Emission applies to all modules of the same configuration. Possible to choose different finish and emission on a configuration upon request.

***Dimensions see page 13

darmes.ca +1 514 225 4139

info@darmes.ca

Rev: 2022/06/02 14