

Etat des Lieux 2A


ASSEMBLY INSTRUCTIONS



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

YOUR BOX SHOULD CONTAIN


1x canopy feed box assembly




1x canopy box assembly



2x glass module



2x flat cable with light



TOOLS NEEDED, NOT INCLUDED

- 2x 8-32 screws for junction box
- 5x wire connectors for junction box
- 2x 8-32 screws for ceiling



1 First, gently insert the flat cable into the glass globe one side at a time.

2x




Make sure the light globe don't rub the glass globe.

Make sure the light face the desired direction.

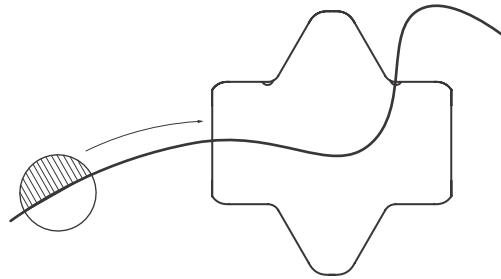

Adjust and set it aside for next steps.

2 Measure, mark and drill appropriate hole distance to mount backplate of canopy feed and supports to ceiling. Install anchors if needed (not included).

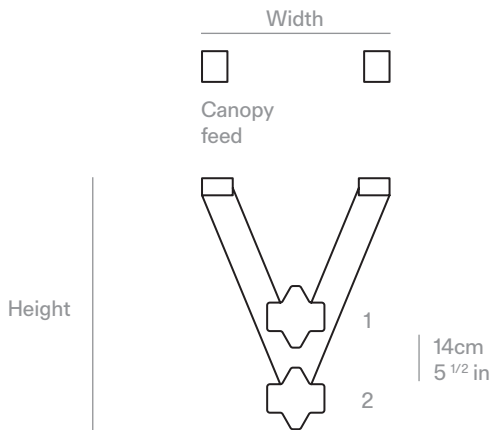

Model	Code	Height	Width	Depth
2A	B	89cm (35in)	59cm (23.3in)	28cm (11in)
	C	112cm (44in)	78cm (30.8in)	28cm (11in)
	D	201cm (79in)	151.6cm (59.7in)	28cm (11in)

Depth



*The dimensions are calculated with an angle of 45 deg of strap.




Unpack all components from the box and dispose of the packaging. Please recycle.

3 Screw backplate in junction box with screw 2x 8-32 machine screws (not included).

Attache ceiling ground wire to backplate ground screw. Make sure other wires go thru backplate center hole as illustrated.




Make sure to install the backplate the side where the strain relief will meet the cable.

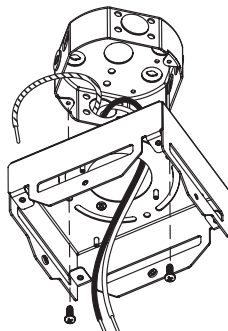

4 Make appropriate connexions with wire bundle provided to ceiling wiring. (Shut off main power at the circuit breaker panel)

Ceiling wires	Fixture wires	For 0-10V dimming
Live	120V: Black 220V: Brown	Purple: DC+
Neutral	White Blue	Grey: DC-
Ground	Green	



Etat des Lieux 2A


ASSEMBLY INSTRUCTIONS



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.


5 First, clip wire connectors.

Then, install driver block with wing nuts provided (push connectors in junction box when installing).

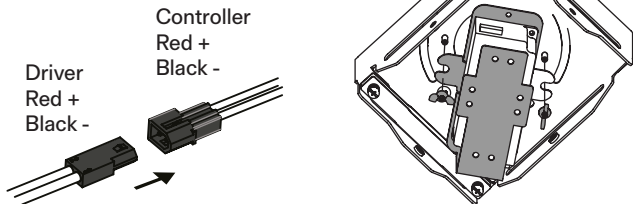


6 Fix non-feed canopy backplate on ceiling (screws not included).

Make sure to install the backplate the side where the strain relief will meet the cable.




7 Install module 1 first.




8 Pass sectioned flat cable in strain relief in canopy feed and canopy box. (Loosen captive screws for better passing of cable)


Screw on each side of cable to retain it in place.




9 Leveling can be done by making sure the cable is in line in strain relief.

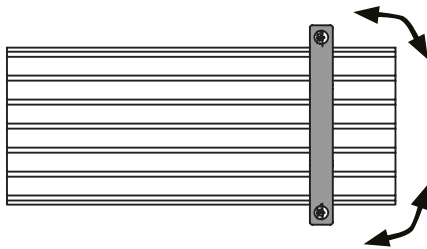

10 Repeat steps 8 and 9 for module 2.




11 Make connections with domino and flat cable in canopy, and clip white cover

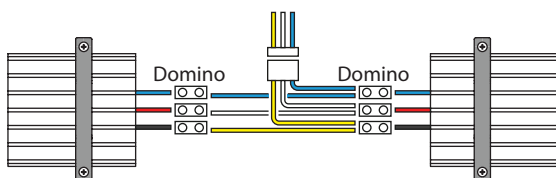

Blue	LED C	Blue
White	LED +	Red
Yellow	LED W	Black

12 Install the canopy covers by sliding up and curving slightly the flat cable to pass the cover.

Then, screw in place with 2x flat screw provided. (Lift cable out of the way for better access)



Etat des Lieux 2A

ASSEMBLY INSTRUCTIONS



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

- 13 Make sure the light engines are centered in the glasses. Leveling can be done by making sure the cable is in line in glass.

